
TM CLARIS

Glass and Partitions

EXPERIENCE THE SUBLIME!

Make a unique design statement with CLARIS Glass and Partition Systems. Designed for a sleek look and engineered for precise, smooth and easy operation, and partition systems help you design spectacular interior spaces. A favorite of leading architects and interior space designers, CLARIS collection is increasingly finding a place in award winning projects, recognized for their bold and contemporary statement.



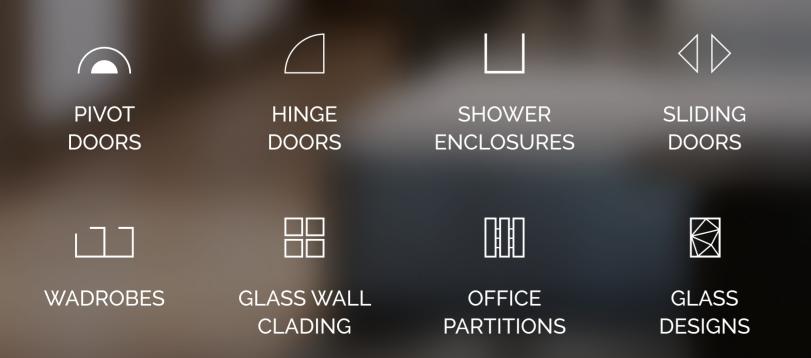

CLARIS OFFICE PARTITIONS

The ULTRALINE demountable office partition is a superior lightweight profile system. It is a based on a 45mm x 25mm glazing seal and bead with a selection of door frame options. Ultraline frames provide an elegant and cost effective design solutions.


FEATURES:


Standard track section : 45mm x 25mm Slim in design, the standard partition suite can be used with any stud thickness. Suitable for 10mm / 12mm toughened glass as well as Laminated glass ranging from 10 to 12mm.

Single door frame sizes to allow for flush door 35mm. Partition height can be offered up to 3000mm.

Single glazed systems.

Sound insulation capacity of 28 – 32 dB.

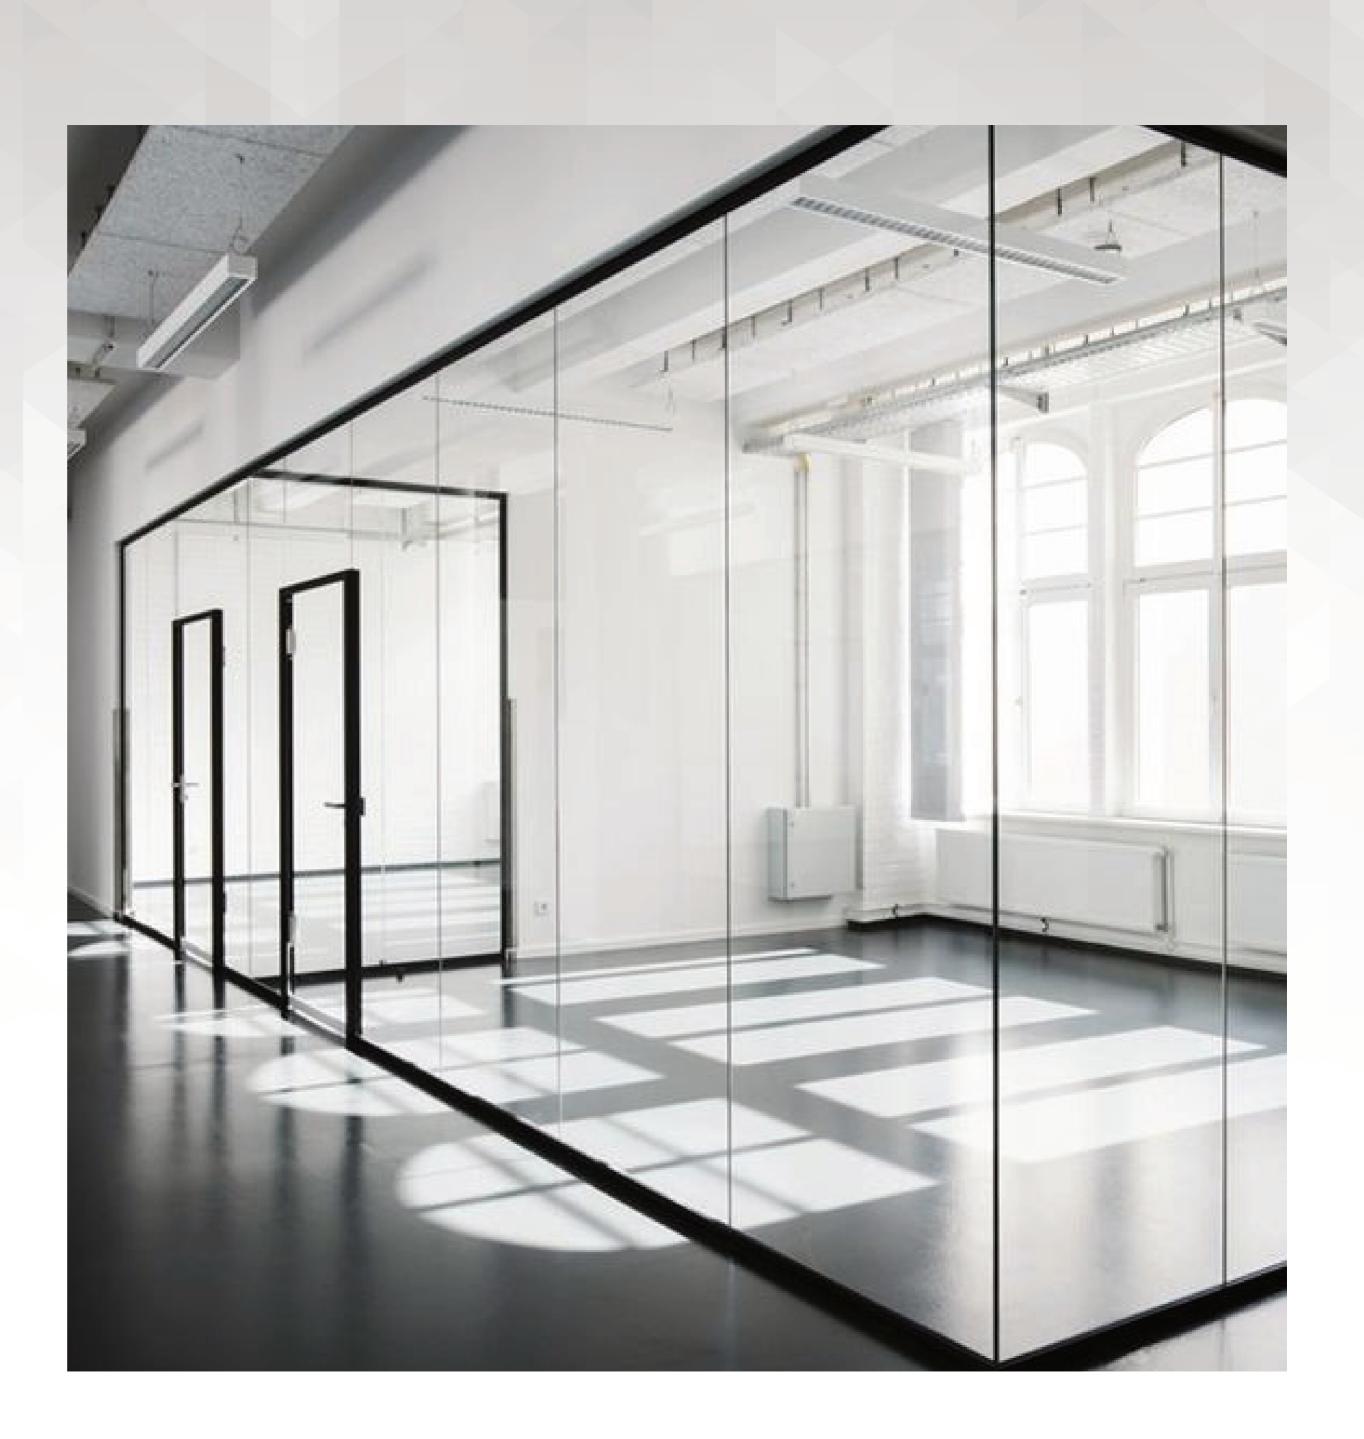

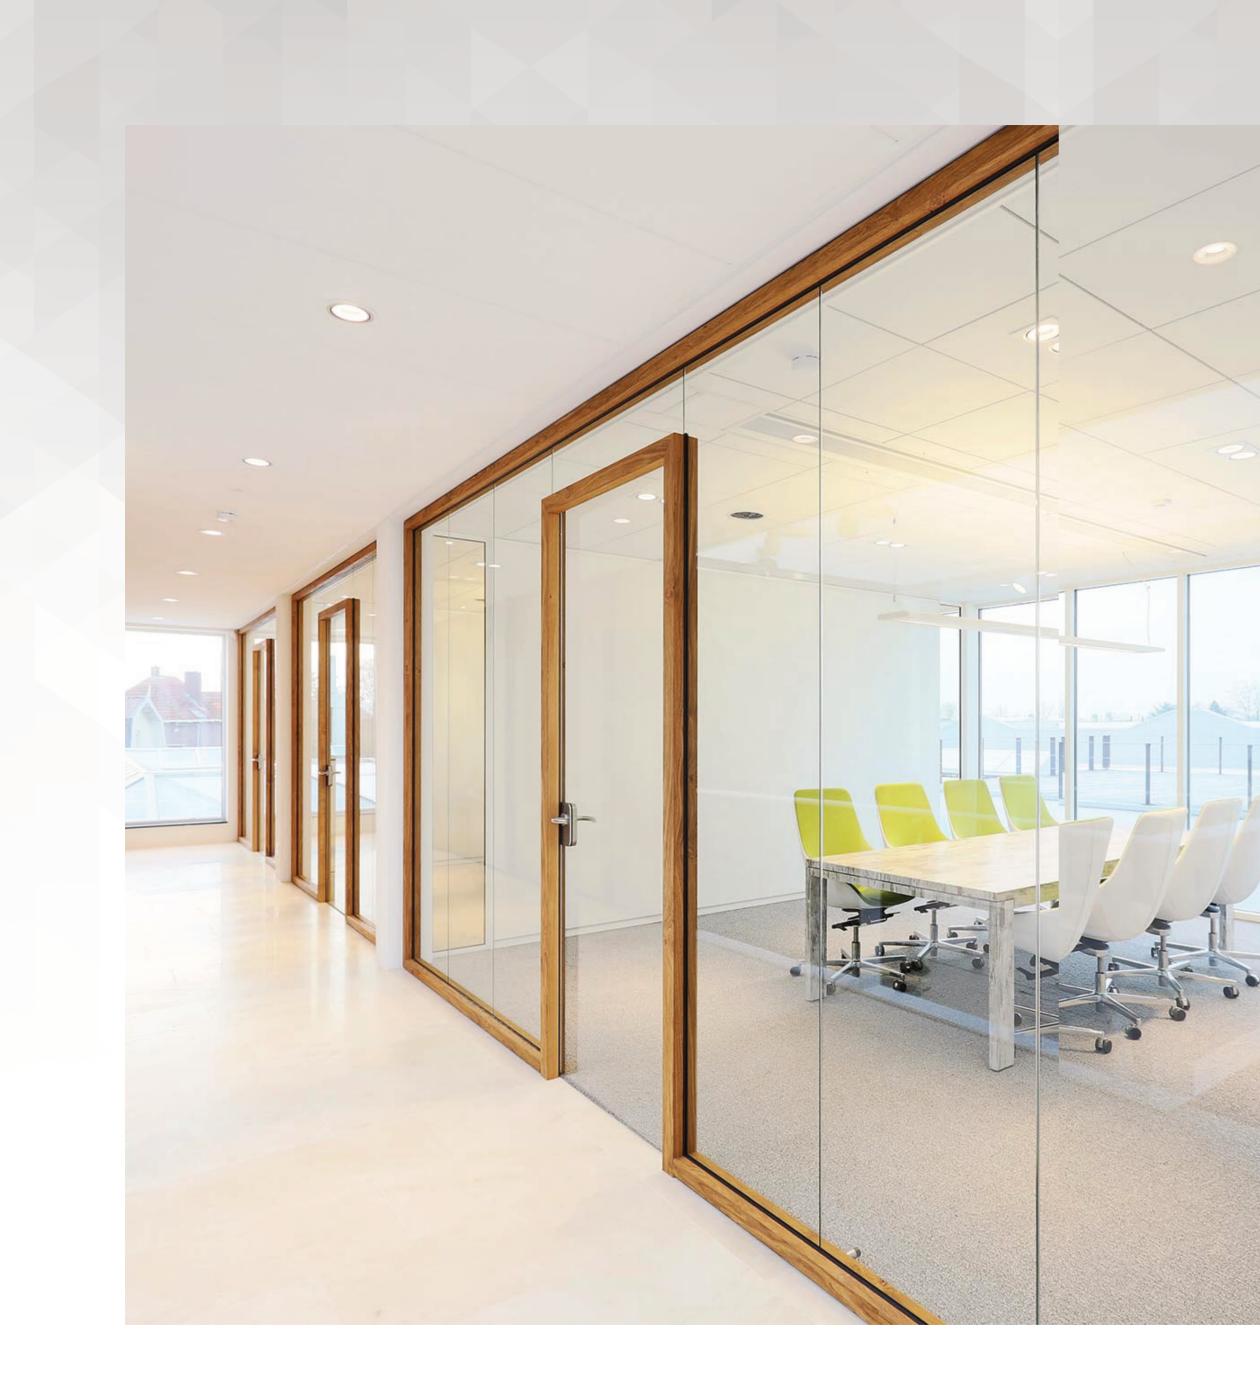

CLARIS OFFICE PARTITIONS

DOOR OPTIONS

Frameless glass, Stile glaze door, Timber or Sliding door system.

SOLID DOORS

Flush doors can be of 45mm solid core in choice of veneers or laminate.

DOOR FRAMES

Aluminium full height up-to 3000mm, Doors are mounted on the either hinges, pivots or sliding tracks. A range of Ironmongery can be supplied and incorporated with Dot line series

SIZE LIMITS

Claris is designed for installation in areas up to nominal vertical panel size of 3000mm x 1200mm.

CLARIS OFFICE PARTITIONS


FINISH

All exposed Aluminium sections are Anodized Aluminium finish with 6463 T6 Grade. Panel Finish Laminate, Melamine, Whiteboard, Veneer, Vinyl, Powder Coated Steel And Pinnable Fabric. These Finishes can be applied in any combination.

FRAME FINISH





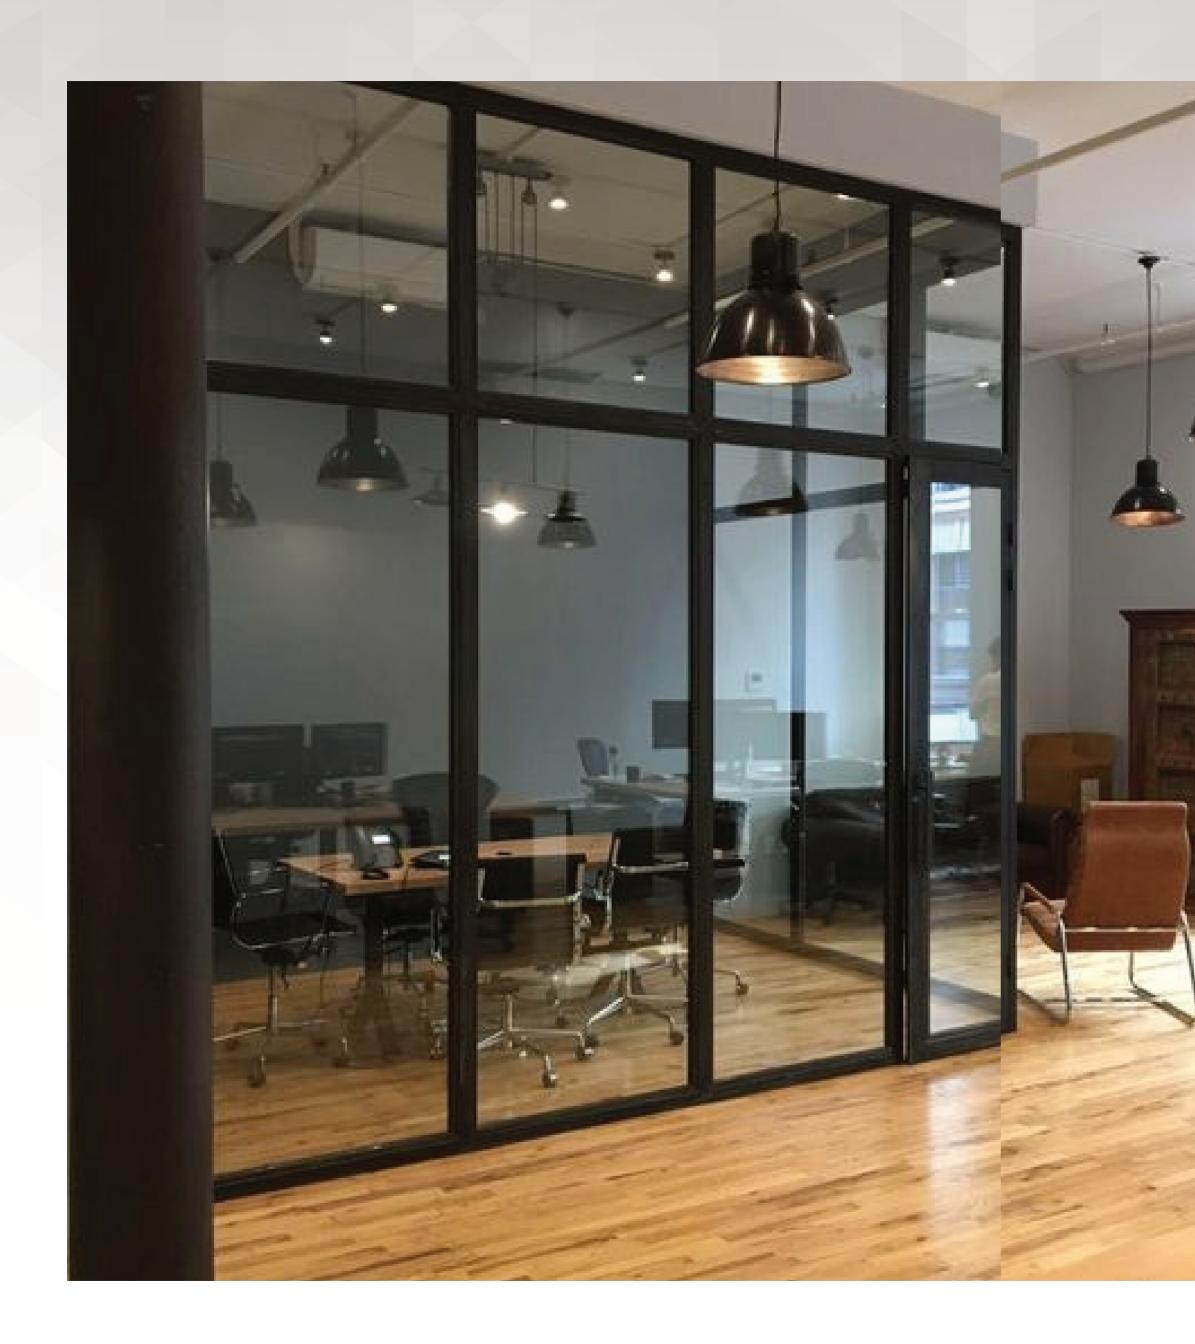


CLARIS OFFICE PARTITIONS

ASSEMBLY CHARACTERISTICS

Glazed panels are hung onto a site installed framework of recessed head, side walls and base channels, studs and transoms. Base tracks have a snap in profile for better installation of glass into section using beads made of silicone gel material and choice of junctions available. Assembly jig supplied ensures the speed and accuracy of the installation and correct alignments of panel. All panels can be removed independently of each other allowing replacement or variation at any time after initial installation.



CLARIS GLASS FINISHES

































CLARIS

Have your dream come true. Contact the glass experts now!



